

# ASPECTS REGARDING THE FINITE ELEMENT ANALYSIS OF THE HERMETIZED HARMONIC DRIVES

ARDELEAN Flavius A.  
University of Oradea  
[aflavius@uoradea.ro](mailto:aflavius@uoradea.ro)

**Keywords:** harmonic drive, hermetized harmonic drive, finite element analysis, flexible gear wheel

Hermetized harmonic drives (HHD) were developed to work in sealed spaces. The sealing of the working areas with the help of the HHD is possible by means of the constructive shape of the flexible gear wheel.

Actually, in this paper, that shape is raising interest because of the deformation and oscillation in the wall of the flexible gear wheel. The elastic gear wheel was modelled in 3D, in two constructive variants as shown in figure 1.

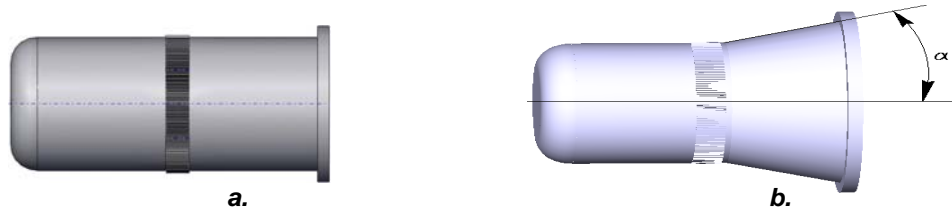


Fig.1 Constructive variants of the elastic gear wheel

Measured deformations were made according to the flexible gear wheel wall (between 1 and 2 mm) and according to the flexible gear wheel diameter, respectively the angle in the case of the truncated cone shape.

An image of the FEA of a HDD flexible gear wheel is presented in figure 2.

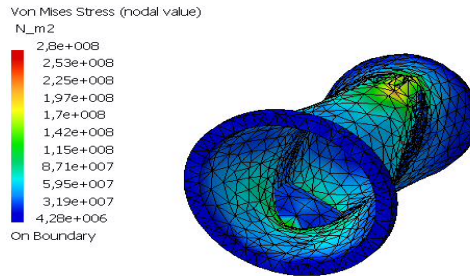


Fig. 2 Flexible gear wheel stressed by a two arms wave generator

## Bibliography

1. Ardelean, A. F., Contributii privind studiul transmisiilor armonice dintate destinate actionarii in spatii ermetizate, Teza de doctorat, Politehnica Timisoara, 2006.
2. Anghel, Șt., Anghel, C., Certain criteria to make a choice harmonic or precision drive for actuated robots, Robotica și management, 1/1997
3. Ianici, S., Aspecte privind alegerea grosimii peretelui roții flexibile a unui angrenaj harmonic, Sesiunea de comunicări tehnico- științifice, Reșița, 1993